

Sea Pro® FH240 Series Manifold Kits (SP1296 and SP1297) Installation Instructions



Sea Pro® FH240 Series Manifold Kits (SP1296 and SP1297) Installation Instructions

Torque Values


Application	Torque		
	in-lb	ft-lb	N-m
Fuel Line In	540-720	45-60	61 - 81
Fuel Line Out	540-720	45-60	61 - 81

SP1296 (Short Manifold)

Part	Description	Quantity
A	Valve Assembly, 3-Way	1
B	Tube Assembly	2

SP1297 (Tall Manifold)

Part	Description	Quantity
A	Valve Assembly, 3-Way	1
B	Tube Assembly	2

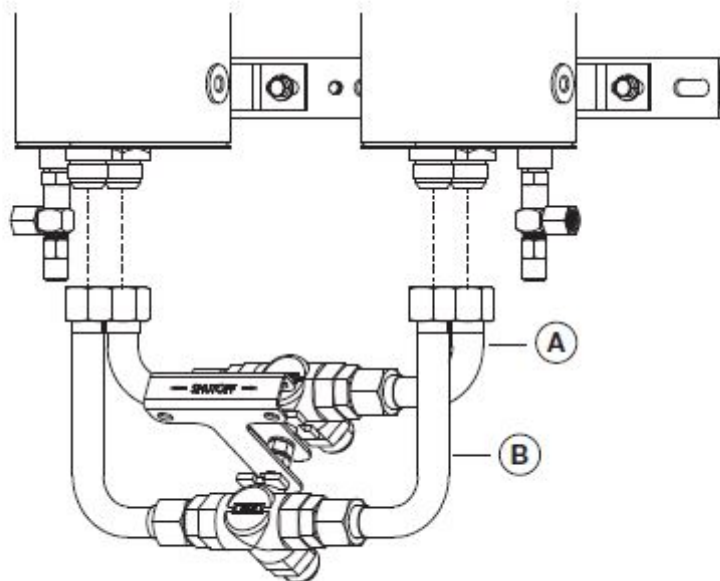

CAUTION: These instructions are intended for use by professional mechanics who are trained in the proper use of power and hand tools, using appropriate safety precautions (including eye protection).

F1864 FGD



[LT36441.pdf](#) [1]

English

[Fuel Filtration](#) [2]

LT36441

For more information call 1800 032 037 or email fleetassist.australia@cummins.com

Products

Links

[1] <https://www.cumminsfiltration.com/sites/default/files/LT36441.pdf>

[2] <https://www.cumminsfiltration.com/literature/fuel>