

FluidPOWER

HD Antifreeze/Coolant

Heavy-Duty OAT

Proven Performance

- 1,000,000 mile Life-of-the-Engine antifreeze
- Cummins and OEM Approved
- Nitrite, Amine, Phosphate and Silicate free
- Superior liner pitting and corrosion protection
- Compatible with all gasket and hose materials

Valuable Versatility

- Compatible with all antifreeze/coolants
- For use in all diesel and gas applications

Simple Serviceability

- Low maintenance coolant with no SCA addition required*



CC36155 Heavy-Duty 50/50 Premix 1 gal
CC36154 Heavy-Duty Concentrate 1 gal

FluidPOWER

Antifreeze/Coolant

Extended Life Automotive/Light-Duty OAT

Proven Performance

- Nitrite, Amine, Phosphate, and Silicate free
- Superior water pump cavitation and corrosion protection
- Compatible with all gasket and hose materials
- 5 years or 150,000 mile life


Valuable Versatility

- Compatible with all antifreeze/coolants
- For use in all automotive diesel and gas applications

Simple Serviceability

- Low maintenance coolant. Simply top off with premixed **Cummins FluidPOWER Antifreeze/Coolant**

*To maintain the protection provided by FluidPOWER OAT, the proper level of inhibitor must be present. This can usually be achieved by topping up the cooling system with premixed FluidPOWER OAT coolant. The user is responsible for ensuring proper additive level and coolant pH is maintained through the use of test strips and addition of new coolant if necessary. The recommended test interval is 300,000 miles, 6,000 hours, or 1 year. The test interval is a precautionary recommendation intended to prevent maintenance and engine problems from causing progressive engine damage.

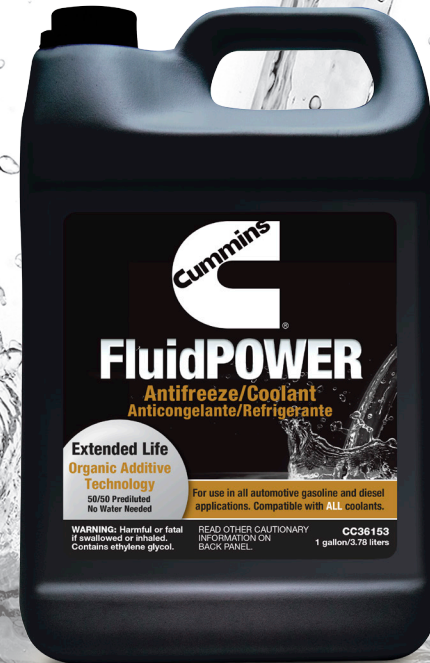

CC36153 Light-Duty 50/50 Premix 1 gal
CC36152 Light-Duty Concentrate 1 gal