


**The purpose of this bulletin is to inform customers of a change in the outer gasket used for Fleetguard filters FF2200 and HF40003.**

## Background:

The outer gasket used to seal these two filters to their respective applications was modified for standardization purposes.

The new gasket profile is slightly thicker, taller and wider vs the existing gasket design. These features help increase the filter's hydrostatic pressure performance. A cross-section size comparison is shown in the table below:

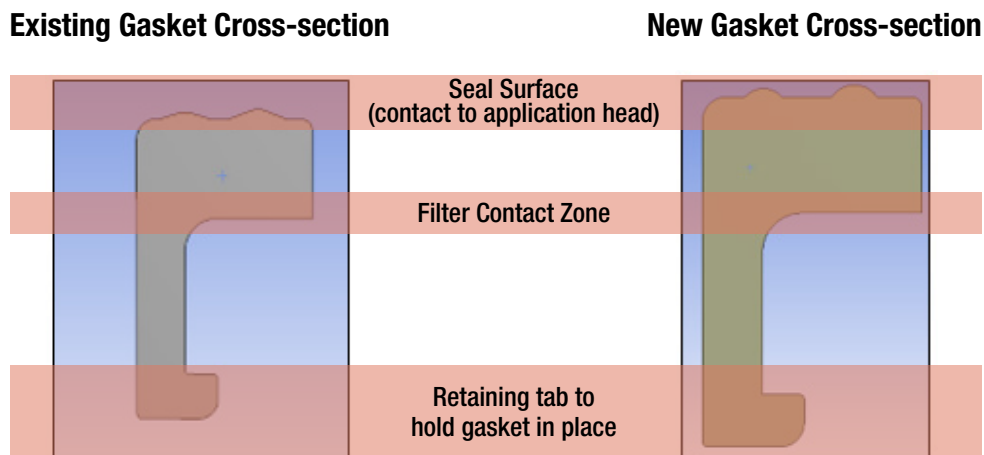

The new gasket will be implemented on the FF2200 and HF40003 starting June 1, 2019 (Julian date code 152).