




FH231 Series Fuel Pro[®] Diesel Fuel Filtration Systems

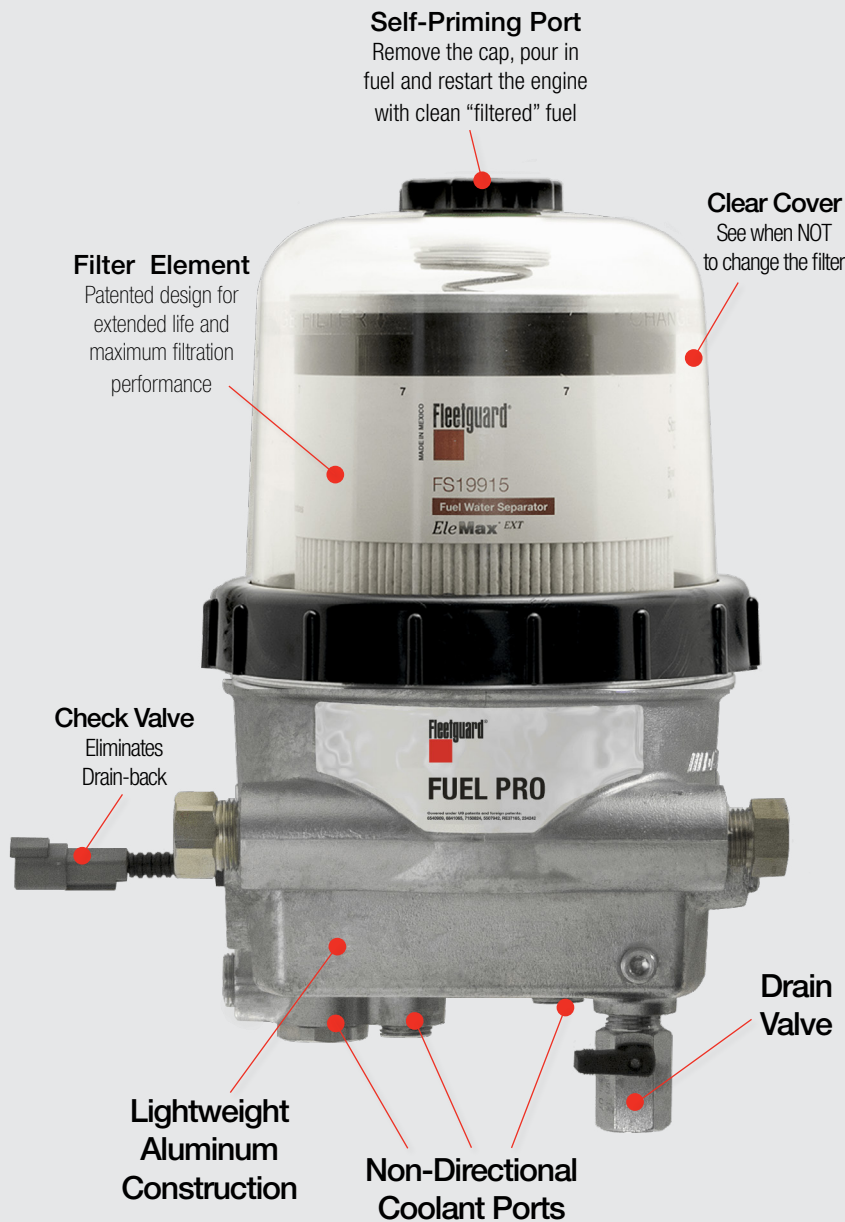

Genuine Filtration Solution

Developed to extend service intervals through increased filter capacity, the Fleetguard FH231 Series Fuel Pro[®] combats the severe challenges of water in diesel fuel commonly facing operators of 10-18L diesel engine equipment today. The FH231 Series Fuel Pro uses a Fleetguard Elemax[®] fuel filter element (FS19915) to prevent fuel system problems and engine damage through superior filtration.

Eliminate Unnecessary Maintenance

This all-in-one fuel filter/water separator and fuel heater was designed for maximum usability. The clear cover provides instant visual indication of filter life through the patented "Seeing is Believing[®]" technology so you can know when it is and when it is not time to change the filter. The Fleetguard FS19915 filter element, featuring patented Elemax[®] technology, enables extended service intervals and increased performance due to its larger size. The FH231 Fuel Pro is also biodiesel B20 compatible.

Five Minute Filter Changes

Fleetguard FH231 Series Fuel Pro allows for environmentally friendly, dry filter changes unlike standard fuel filters which can spill fuel during removal. Simply drain the fuel below the service collar, remove the collar with a Fleetguard wrench (SP1076) or common tool, and replace the old element with a new one. The check valve eliminates drain-back during filter changes and a simple priming port enables easier engine start-up

Optional Performance

- Base Model — Unheated with Coolant Heat Ports
- Electric Heat
 - 12VDC or 24VDC Pre-heater
 - 120VAC Overnight heater
- Water-In-Fuel (WIF) sensor

Learn more about how Fuel Pro separates water from your fuel!
Visit: <https://www.youtube.com/watch?v=A3FQ0wzcLUU>

GOOD NEWS FOR BAD FUEL

Product Specifications


Housing Part Number	Filter Element	Micron Rating	Heater	WIF	Fuel Flow	Fuel In & Out Port Size	Priming Pump
FH23100	FS19915	7	N/A	N/A	In Left Out Left	1/2-14 NPTF	N/A
FH23166	FS19915	7	24VDC, 150W	Yes	In Right Out Left	1/2-14 NPTF	N/A

Overall Height	Overall Depth	Max Width	Mount Bracket Centers	Weight (Dry)	Fuel Capacity (w/o filter)	Max Fuel Flow Rate	Filter Service Clearance	Electrical Heater Options
14.28 in	6.58 in	8.35 in	3.94 in	10.35 lbs	0.58 gal	180 gal/hr	3.5 in	12VDC, 195W, 18A 120VAC, 75W, .65A



Learn how to service your Fuel Pro with ease!
Visit: https://www.youtube.com/watch?v=-wx_iN3W2Jk

Coolant Heat Routing

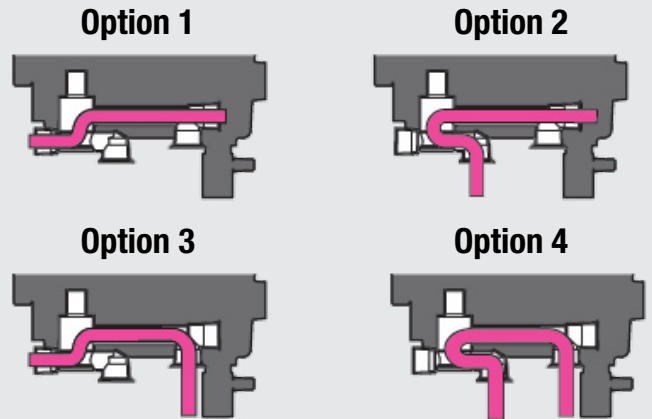

Best Warranty in the Business.

The Cummins Filtration Warranty extends to our entire line of products, ensuring the same promise of performance and coverage beyond the competition. Visit cumminsfiltration.com to learn more about the competitive benefits of the Cummins Filtration Warranty.



cumminsfiltration.com
LT36578 ©2017 Cummins Filtration Inc.

